

T8 2呎輕鋼架-1管



R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22



吸炭兩用


材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	7W	9W	10W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	700 lm-1000 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

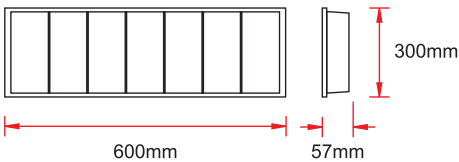

產品型號

7W	T8C-2FAL1-007W-60K-H
	T8E-2FAL1-007W-60K-H
9W	T8C-2FAL1-009W-60K-H
	T8E-2FAL1-009W-60K-H
10W	T8C-2FAL1-010W-60K-H
	T8E-2FAL1-010W-60K-H

T8 2呎輕鋼架-2管

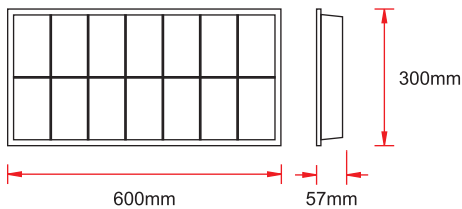

R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞



IP22



吸炭兩用

材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	14W	18W	20W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	1400 lm-2000 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

產品型號

14W	T8C-2FAL2-014W-60K-H
	T8E-2FAL2-014W-60K-H
18W	T8C-2FAL2-018W-60K-H
	T8E-2FAL1-018W-60K-H
20W	T8C-2FAL1-020W-60K-H
	T8E-2FAL1-020W-60K-H

T8 2呎輕鋼架-3管



R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞



IP22




吸炭兩用

材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	21W	27W	30W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	2100 lm-3000 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

產品型號

21W	T8C-2FAL3-021W-60K-H
	T8E-2FAL3-021W-60K-H
27W	T8C-2FAL3-027W-60K-H
	T8E-2FAL3-027W-60K-H
30W	T8C-2FAL3-030W-60K-H
	T8E-2FAL3-030W-60K-H

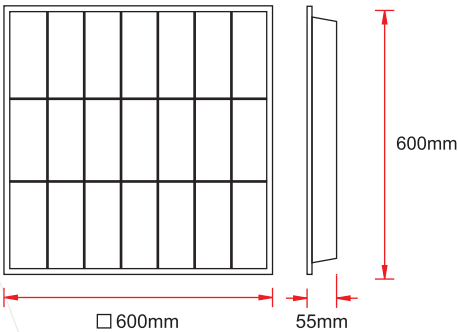

T8 2呎輕鋼架-4管



節能標章



R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22



吸炭
兩用

吸炭兩用

材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	26W	36W	40W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	2800 lm-4000 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

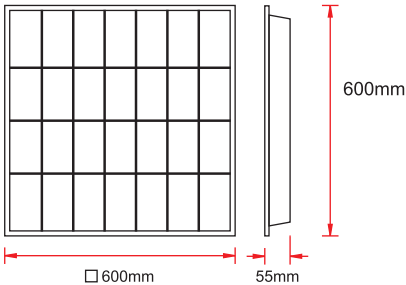

產品型號

26W	T8C-2FAL4-026W-60K-H
	T8E-2FAL4-026W-60K-H
36W	T8C-2FAL4-036W-60K-H
	T8E-2FAL4-036W-60K-H
40W	T8C-2FAL4-040W-60K-H
	T8E-2FAL4-040W-60K-H

T8 4呎輕鋼架-1管



R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞



IP22




吸炭兩用


材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	9W	12W	18W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	900 lm-2000 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

產品型號

9W	T8C-4FAL1-009W-60K-H
	T8E-4FAL1-009W-60K-H
12W	T8C-4FAL1-012W-60K-H
	T8E-4FAL1-012W-60K-H
18W	T8C-4FAL1-018W-60K-H
	T8E-4FAL1-018W-60K-H



T8 4呎輕鋼架-2管



R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞



IP22




吸炭兩用

材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	18W	24W	36W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	1800 lm-4000 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

產品型號

18W	T8C-4FAL2-018W-60K-H
	T8E-4FAL2-018W-60K-H
24W	T8C-4FAL2-024W-60K-H
	T8E-4FAL2-024W-60K-H
36W	T8C-4FAL2-036W-60K-H
	T8E-4FAL2-036W-60K-H

T8 4呎輕鋼架-3管

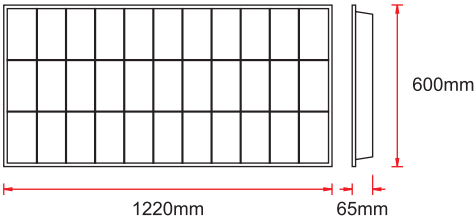

R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞



IP22




吸炭兩用

材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	27W	36W	54W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	2700 lm-10800 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

產品型號

27W	T8C-4FAL3-027W-60K-H
	T8E-4FAL3-027W-60K-H
36W	T8C-4FAL3-036W-60K-H
	T8E-4FAL3-036W-60K-H
54W	T8C-4FAL3-054W-60K-H
	T8E-4FAL3-054W-60K-H

T8 4呎輕鋼架-4管

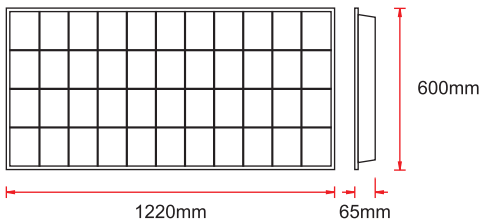

R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞



IP22



吸炭兩用

材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	36W	48W	72W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	3600 lm-14400 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

產品型號

36W	T8C-4FAL4-036W-60K-H
	T8E-4FAL4-036W-60K-H
48W	T8C-4FAL4-048W-60K-H
	T8E-4FAL4-048W-60K-H
72W	T8C-4FAL4-072W-60K-H
	T8E-4FAL4-072W-60K-H