

6060直下型平板燈-3公分



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22

材質	鋁合金+塑料						
演色性 (CRI)	>80						
功率因數	>0.9						
色溫 (CCT)	4000K	5000K	5700K	6500K			
功率 (W)	18W	22W	25W	30W	36W	48W	60W
發光效率	100 lm/w-145 lm/w						
光通量/流明 (lm)	2500 lm-10800 lm						
光源壽命	50000hr						
輸入電壓	100-240 Vac						

產品型號

18W	PLD-2F2F018W-30-65K-3-H
22W	PLD-2F2F022W-30-65K-3-H
25W	PLD-2F2F025W-30-65K-3-H
30W	PLD-2F2F030W-30-65K-3-H
36W	PLD-2F2F036W-30-65K-3-H
48W	PLD-2F2F048W-30-65K-3-H
60W	PLD-2F2F060W-30-65K-3-H

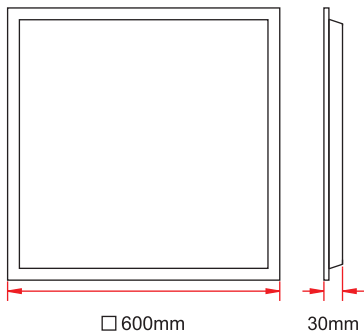


6060直下型平板燈-5公分



材質	鋁合金+塑料							
演色性 (CRI)	>80							
功率因數	>0.9							
色溫 (CCT)	4000K		5000K		5700K		6500K	
功率 (W)	18W	20W	22W	25W	30W	36W	48W	60W
發光效率	145 lm/w-170 lm/w							
光通量/流明 (lm)	2500 lm-10800 lm							
光源壽命	50000hr							
輸入電壓	100-240 Vac							

產品型號

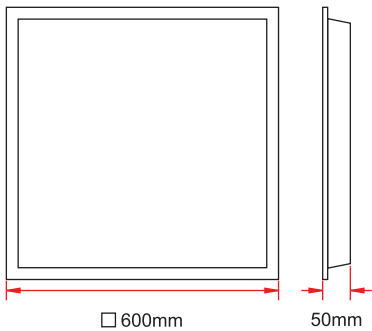

18W	145 lm	PLD-2F2F18-40WK57-63
20W		
22W		
25W	166 lm	PLD-2F2FX-14-48WK30-65
30W		
36W	170 lm	PLD-2F2F-20W-5700K
48W		
60W		

12030直下型平板燈-3公分





歐盟安全標準



無藍光危害



無頻閃




不含鉛汞



IP22

材質	鋁合金+塑料							
演色性 (CRI)	>80							
功率因數	>0.9							
色溫 (CCT)	4000K		5000K		5700K		6500K	
功率 (W)	18W	20W	22W	25W	30W	36W	48W	60W
發光效率	100 lm/w-180 lm/w							
光通量/流明 (lm)	2500 lm-10800 lm							
光源壽命	50000hr							
輸入電壓	100-240 Vac							

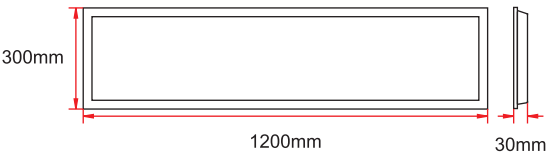

產品型號

18W	PLD-4F1F18W-30-65K-3-H
20W	PLD-4F1F20W-30-65K-3-H
22W	PLD-4F1F22W-30-65K-3-H
25W	PLD-4F1F25W-30-65K-3-H
30W	PLD-4F1F30W-30-65K-3-H
36W	PLD-4F1F36W-30-65K-3-H
48W	PLD-4F1F48W-30-65K-3-H
60W	PLD-4F1F60W-30-65K-3-H

12030直下型平板燈-5公分



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22

材質	鋁合金+塑料							
演色性 (CRI)	>80							
功率因數	>0.9							
色溫 (CCT)	4000K		5000K		5700K		6500K	
功率 (W)	18W	20W	22W	25W	30W	36W	48W	60W
發光效率	100 lm/w-180 lm/w							
光通量/流明 (lm)	2500 lm-10800 lm							
光源壽命	50000hr							
輸入電壓	100-240 Vac							

產品型號

18W	PLD-4F1F18W-30-65K-5-H
20W	PLD-4F1F20W-30-65K-5-H
22W	PLD-4F1F22W-30-65K-5-H
25W	PLD-4F1F25W-30-65K-5-H
30W	PLD-4F1F30W-30-65K-5-H
36W	PLD-4F1F36W-30-65K-5-H
48W	PLD-4F1F48W-30-65K-5-H
60W	PLD-4F1F60W-30-65K-5-H



12060直下型平板燈-3公分



歐盟安全標準



無藍光危害



無頻閃




不含鉛汞



IP22

材質	鋁合金+塑料						
演色性 (CRI)	>80						
功率因數	>0.9						
色溫 (CCT)	4000K	5000K	5700K	6500K			
功率 (W)	36W	44W	46W	50W	60W	72W	96W
發光效率	100 lm/w-180 lm/w						
光通量/流明 (lm)	3600 lm-17200 lm						
光源壽命	50000hr						
輸入電壓	100-240 Vac						

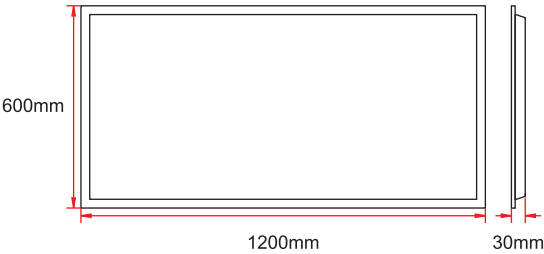

產品型號

36W	PLD-4F2F36W-30-65K-3-H
44W	PLD-4F2F44W-30-65K-3-H
46W	PLD-4F2F46W-30-65K-3-H
50W	PLD-4F2F50W-30-65K-3-H
60W	PLD-4F2F60W-30-65K-3-H
72W	PLD-4F2F72W-30-65K-3-H
96W	PLD-4F2F96W-30-65K-3-H

12060直下型平板燈-5公分



歐盟安全標準



無藍光危害



無頻閃




不含鉛汞



IP22

材質	鋁合金+塑料				
演色性 (CRI)	>80				
功率因數	>0.9				
色溫 (CCT)	4000K	5000K	5700K	6500K	
功率 (W)	36W	44W	50W	60W	72W
發光效率	100 lm/w-180 lm/w				
光通量/流明 (lm)	3600 lm-12960 lm				
光源壽命	50000hr				
輸入電壓	100-240 Vac				

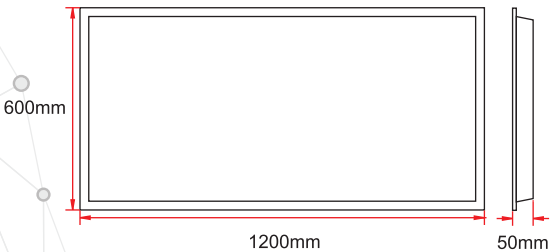

產品型號

36W	PLD-4F2F36W30-65K-5-H
44W	PLD-4F2F44W30-65K-5-H
46W	PLD-4F2F46W30-65K-5-H
50W	PLD-4F2F50W30-65K-5-H
60W	PLD-4F2F60W30-65K-5-H
72W	PLD-4F2F72W30-65K-5-H