

軌道燈-A型



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22

材質	鋁合金+塑膠+強化玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	9W	12W	18W
發光效率	>100 lm/w		
光通量/流明 (lm)	900 lm-1800 lm		
光源壽命	30000hr		
輸入電壓	100-240 Vac		
發光角度	15°	24°	

產品型號

9W	TRA-COB-009W
12W	TRA-COB-012W
18W	TRA-COB-018W

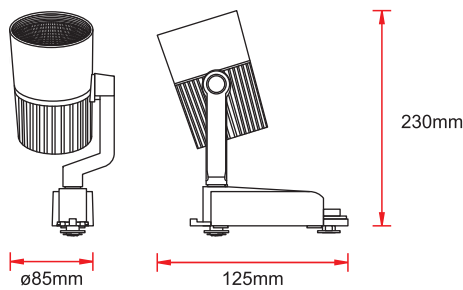

軌道燈-B型



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22

材質	鋁合金+塑膠+強化玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	9W	12W	18W
發光效率	>100 lm/w		
光通量/流明 (lm)	900 lm-1800 lm		
光源壽命	30000hr		
輸入電壓	100-240 Vac		
發光角度	15°	24°	

產品型號

9W	TRB-COB-009W
12W	TRB-COB-012W
18W	TRB-COB-018W

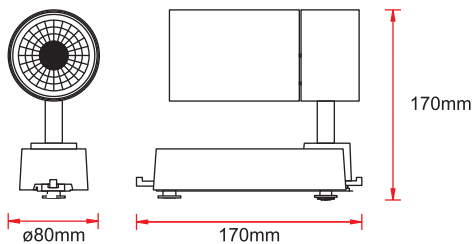

軌道燈-C型



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22

材質	鋁合金+塑膠+強化玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	9W	12W	18W
發光效率	>100 lm/w		
光通量/流明 (lm)	900 lm-1800 lm		
光源壽命	30000hr		
輸入電壓	100-240 Vac		
發光角度	15°	24°	

產品型號

9W	TRC-COB-009W
12W	TRC-COB-012W
18W	TRC-COB-018W

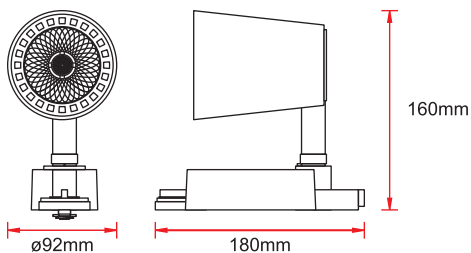

軌道燈-D型



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22

材質	鋁合金+塑膠+強化玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	9W	12W	18W
發光效率	>90 lm/w		
光通量/流明 (lm)	900 lm-1800 lm		
光源壽命	30000hr		
輸入電壓	100-240 Vac		
發光角度	24°		

產品型號

9W	TRD-COB-009W
12W	TRD-COB-012W
18W	TRD-COB-018W

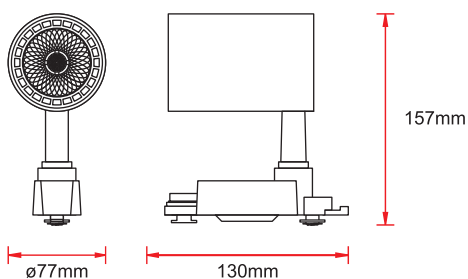

軌道燈-E型





歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22

材質	鋁合金+塑膠+強化玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	9W	12W	18W
發光效率	>100 lm/w		
光通量/流明 (lm)	900 lm-1800 lm		
光源壽命	30000hr		
輸入電壓	100-240 Vac		
發光角度	24°		

產品型號

9W	TRE-SMD-009W
12W	TRE-SMD-012W
18W	TRE-SMD-018W

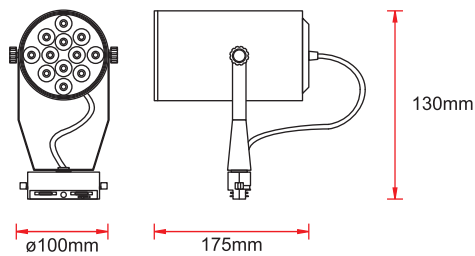

軌道燈-F型



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞



IP22

材質	鋁合金+塑膠		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	12W		
發光效率	>100 lm/w		
光通量/流明 (lm)	1200 lm		
光源壽命	30000hr		
輸入電壓	100-240 Vac		
發光角度	24°		

產品型號

12W	TRF-SMD-012W
-----	--------------

