

T8 2呎工事燈-單管

單管
2呎

單管
2呎

單管
2呎

單管
2呎

單管
2呎

單管
2呎

單管
2呎

單管
2呎

單管
2呎

單管
2呎

單管
2呎



R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22

材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	7W	9W	10W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	700 lm-1000 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

產品型號

7W	T8W-2FAL1-007W-60K-H
9W	T8W-2FAL1-009W-60K-H
10W	T8W-2FAL1-010W-60K-H

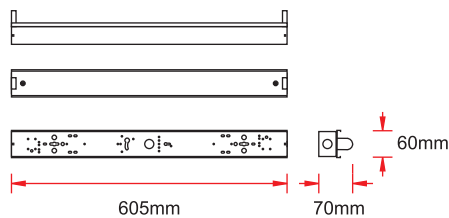

T8 2呎工事燈-雙管



R45674



歐盟安全標準



無藍光危害



無頻閃



不含鉛汞




IP22

材質	鋁合金+塑料/鋁合金+玻璃		
演色性 (CRI)	>80		
功率因數	>0.9		
色溫 (CCT)	3000K	4000K	6500K
功率 (W)	14W	18W	20W
發光效率	100 lm/w-180 lm/w		
光通量/流明 (lm)	1400 lm-2000 lm		
光源壽命	50000hr		
輸入電壓	100-240 Vac		

產品型號

14W	T8W-2FAL2-014W-60K-H
18W	T8W-2FAL2-018W-60K-H
20W	T8W-2FAL2-020W-60K-H

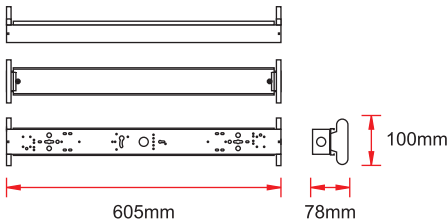

T8 4呎工事燈-單管



R45674



歐盟安全標準



無藍光危害



無頻閃




不含鉛汞



IP22

材質	鋁合金+塑料/鋁合金+玻璃					
演色性 (CRI)	>80					
功率因數	>0.9					
色溫 (CCT)	3000K		4000K		6500K	
功率 (W)	9W	10W	12W	13W	18W	20W
發光效率	100 lm/w-180 lm/w					
光通量/流明 (lm)	900lm-2000 lm					
光源壽命	50000hr					
輸入電壓	100-240 Vac					

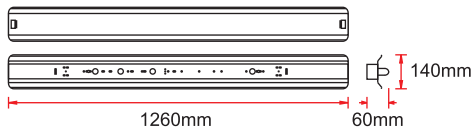

產品型號

9W	T8W-4FAL1-009W-60K-H
10W	T8W-4FAL1-010W-60K-H
12W	T8W-4FAL1-012W-60K-H
13W	T8W-4FAL1-013W-60K-H
18W	T8W-4FAL1-018W-60K-H
20W	T8W-4FAL1-020W-60K-H

T8 4呎工事燈-雙管



節能標章



R45674



歐盟安全標準



無藍光危害



無頻閃




不含鉛汞



IP22

材質	鋁合金+塑料/鋁合金+玻璃					
演色性 (CRI)	>80					
功率因數	>0.9					
色溫 (CCT)	3000K		4000K		6500K	
功率 (W)	18W	20W	24W	26W	36W	40W
發光效率	100 lm/w-180 lm/w					
光通量/流明 (lm)	1800 lm-4000 lm					
光源壽命	50000hr					
輸入電壓	100-240 Vac					

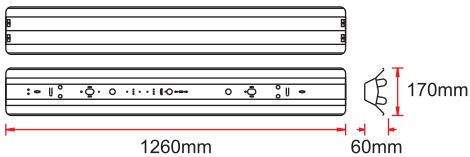

產品型號

18W	T8W-4FAL2-018W-60K-HP
20W	T8W-4FAL2-020W-60K-HP
24W	T8W-4FAL2-024W-60K-HP
26W	T8W-4FAL2-026W-60K-HP
36W	T8W-4FAL2-036W-60K-HP
40W	T8W-4FAL2-040W-60K-HP